

2" Solid Brass Faceplate Sash Pulley

Product Data Sheet

For 6 mm, 7 mm or 8 mm sash cord.

Check your cord size, sash weight and the dimensions shown before you order. The maximum sash weight is **264 lb (120 kg)**. Choose square or round ends; both faceplates are 32 mm x 127 mm.

1 Key features

- **Rivetless solid brass faceplate**
- Matching ball-bearing wheels
- Galvanised pulley cage
- **96 hour salt spray tested**
- Square or round ends
- Colour-matched screws included
- **20-year replacement guarantee**
- Available in a range of finishes, including **PVD** for maximum durability and **Lacquered Brass** for best value

PVD (Physical Vapour Deposition) is a wear-resistant finish with high scratch resistance.

2 Specification


Item	Detail
Faceplate	Rivetless solid brass
Pulley cage	Galvanised
Wheel	Ball bearing, 2 in (50 mm)
Sash cord	6 mm, 7 mm or 8 mm
Max sash weight	264 lb (120 kg)
Faceplate size	32 mm x 127 mm
Fixing holes	Square 4, round 2
Faceplate thickness	4.5 mm
Overall depth	52 mm
Cage height	83 mm
Guarantee	20-year replacement

3 Product



Square and round ends shown

4 Dimensions

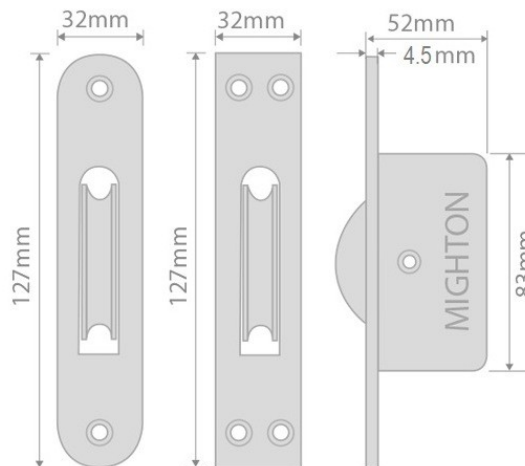

All dimensions in mm

5 Lacquered Brass: care and sealants

Keep caulk off Lacquered Brass

Lacquer slows tarnishing, but Lacquered Brass will develop an authentic patina over time with handling. Avoid direct contact between caulk and lacquered brass where possible. If you must seal nearby, follow the points below.

- Use a **neutral-cure silicone** or **100% acrylic caulk** labelled 'non-corrosive' or 'safe for metals'.
- Apply masking tape to protect the brass before caulking.
- Test a small hidden area first.