Traditional Solid Sash Ring Pull

Product Data Sheet

Ring pull for the top sash. Sold singly, usually fitted in pairs.
Fitted to the bottom rail of the top sash, for closing it when the window is out of easy reach.

1 Key features

- Solid brass
- Pull with a finger, or more usually with a window **pole hook**
- Available in a range of finishes, including **PVD**
- Matching screws supplied
- Simple to fit
- Sold in singles

2 Product



Polished Chrome shown


3 Specification

Item	Detail
Product	Solid sash ring pull
Product code	See finishes below
Material	Solid brass
Size (W x L x H)	16 mm x 41 mm x 32 mm
Inside diameter	22 mm
Fixings	Matching screws supplied
Use	Bottom rail of the top sash

4 Before you order

Sold singly. Two are usually fitted.
Ring pulls are usually fitted in pairs, **one either side of the sash**. Order the number you need.

5 Dimensions

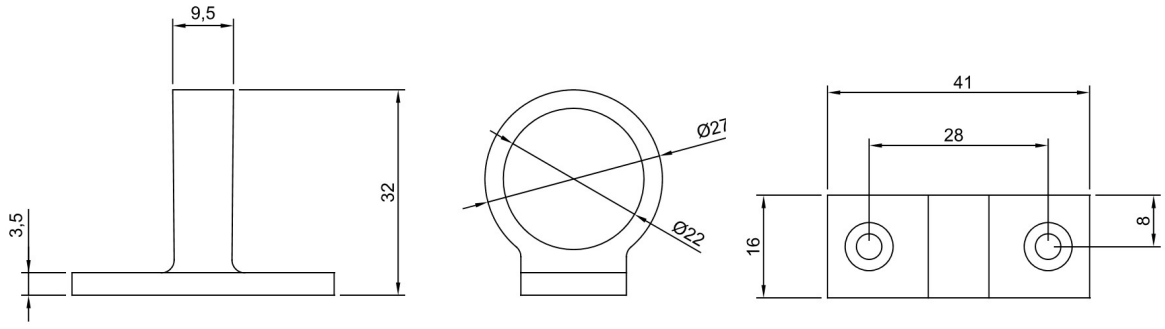

All dimensions in mm

6 Finishes and product codes

Finish	Product code	Finish	Product code
PVD Brass	RPSLNONPVD	**Satin Chrome**	RPSLNONSC
Lacquered Brass	RPSLNON	**Antique Pewter**	RPSLNONAP
Satin Brass	RPSLNONSB	**Satin Black**	RPSLNONB
Antique Brass	RPSLNONABR	**Oil Rubbed Bronze**	RPSLNONORB
Polished Chrome	RPSLNONCH		

PVD (Physical Vapour Deposition) is a strong, wear-resistant finish with high durability and scratch resistance.

Lacquered Brass will tarnish. It is polished and lacquered, not plated. Lacquer can hinder tarnishing, but with handling it will eventually tarnish and take on an authentic 'used' look.